



SPITZNAS

TOOLS FOR THE SPECIALIST HAMMER DRILLS WITH SDS-PLUS SHANK

PNEUMATIC



HYDRAULIC



UNDERWATER
OPERATION




ATEX
Guideline 2014/34/EU



MACHINE FEATURES



SDS-plus shank

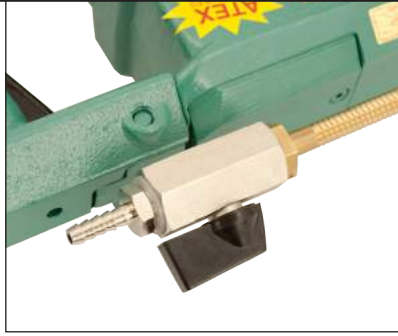


Depth stop
with integrated rinsing connection



Handle with
lever control



ATEX-Safety Class

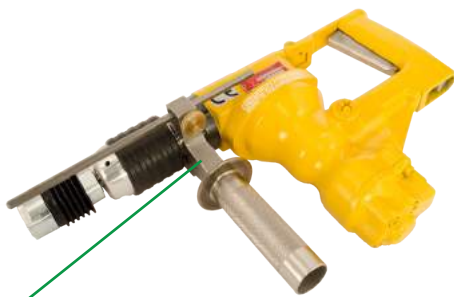

Hydraulic type



Hydraulic or pneumatic type



Type for underwater operation



TECHNICAL SPECIFICATION

HAMMER DRILLS - SDS-plus shank

Drilling up to 28 mm in concrete.
Impact mechanism can be switched on and off.



Order no.	ATEX Guideline 2014/34/EU	Free speed rpm	Power kW	Blows per minute rpm	Drilling capacity in concrete mm	Air consumption m ³ /min	Length incl. drill chuck mm	Connection inlet/outlet	Hose ID mm	Noise level dB(A)	Vibration level m/s ²	Weight kg
2 2404 0010	II2GcT6	625	0.50	3,000	28	0.60	410	R1/2"female/ R3/8"female	≥10	93	4.5	6.3
2 2408 0010	IM2cT6	625	0.50	3,000	28	0.60	410	Rd 32 x 1/8"	≥10	93	4.5	9.5

Performance data at an operating pressure of 6 bar (cont. flow).

HAMMER DRILL - SDS-plus shank

Drilling up to 28 mm in concrete.
Impact mechanism can be switched on and off.
Usable as well under water.



Order no.	ATEX Guideline 2014/34/EU	Free speed rpm	Power kW	Blows per minute rpm	Drilling capacity in concrete mm	Air consumption m ³ /min	Length incl. drill chuck mm	Connection inlet/outlet	Hose ID mm	Noise level dB(A)	Vibration level m/s ²	Weight kg
2 2404 0040	II2GcT6	625	0.50	3,000	28	0.60	410	R1/2"female/ R3/8"female	≥10	93	4.5	6.3

Performance data at an operating pressure of 6 bar (cont. flow).

HAMMER DRILL - SDS-plus shank

The hydraulic hammer drill with SDS-plus shank for drilling up to 28 mm in concrete with integrated pressure relief valve.
Impact mechanism can be switched on and off.
Usable as well under water.



Order no.	Free speed rpm	Power kW	Blows per minute rpm	Drilling capacity concrete/masonry mm	Oil flow l/min	Length incl. drill chuck mm	Connection	Noise level dB(A)	Vibration level m/s ²	Weight without hoses kg
2 2426 0010	500	1.2	3,400	28/50	15-25	460	3/4"-16 UNF	92	4.5	8.2

Hydraulic hose coupling : 1/2" FF -Flat-Face coupling, ISO 16028, 1/2"BSP/BG2 Performance data at an operating pressure of 140 bar (cont. flow).

HAMMER DRILL - SDS-plus shank

The hydraulic hammer drill with SDS-plus shank for drilling up to 28 mm in concrete.
Impact mechanism can be switched on and off.
Usable as well under water.



Order no.	ATEX Guideline 2014/34/EU	Free speed rpm	Power kW	Blows per minute rpm	Drilling capacity concrete/masonry mm	Oil flow l/min	Length incl. drill chuck mm	Connection	Noise level dB(A)	Vibration level m/s ²	Weight without hoses kg
2 2406 0010	II2GcT5	500	1.2	3,400	28/50	15-45	460	3/4"-16 UNF	92	4.5	8.2

Hydraulic hose coupling : 1/2" FF -Flat-Face coupling, ISO 16028, 1/2"BSP/BG2 Performance data at an operating pressure of 80 bar (cont. flow).

Subject to change without notice

ACCESSORIES

DRILL BITS, SDS-plus shank, diameter 10 mm

The hard metal drill bits are especially for drilling in concrete, masonry and natural stone. When drilling over 500 mm, drill a pilot hole of at least 150 mm with a shorter bit (of the same diameter).



Order no.	dia.	overall length	spiral length	Order no.	dia.	overall length	spiral length	Order no.	dia.	overall length	spiral length
	mm		mm		mm		mm		mm		mm
9 2513 1550	5	160	100	9 2513 1610	12	160	100	9 2513 1680	20	300	250
9 2513 1560	6	160	100	9 2513 1620	12	260	200	9 2513 1700	22	250	200
9 2513 1570	8	160	100	9 2513 1630	14	160	100	9 2513 1710	22	450	400
9 2513 1580	10	160	100	9 2513 1640	14	260	200	9 2513 1730	25	250	200
9 2513 1590	10	260	200	9 2513 1660	16	300	250	9 2513 1740	25	450	400

ADDITIONAL ACCESSORIES



Order no.	Description	Thread connection/ for type
9 2902 0200	Quick-release chuck	2 2404 / 2 2406 / 2 2408 / 2 2426
9 2902 0210	SDS-plus adapter for quick-release chuck	2 2404 / 2 2406 / 2 2408 / 2 2426
2 2406 9010	Hydraulic pressure hose set	2 2406 / 2 2426
2 2406 9800	Safety Block (inlet pressure up to 140 bar)	2 2406
2 2406 9900	Safety Block (inlet pressure up to 350 bar)	2 2406
9 2406 0080	Service unit with filter and oiler for pipe installation	R 3/4"i
9 2406 0170	Service unit with filter, oiler and pressure regulator for pipe installation	R 3/4"i
9 2406 0260	Portable service unit with filter, oiler and pressure regulator	R 3/4"i
9 2406 0650	Portable service unit with protection housing, filter, oiler and pressure regulator	R 3/4"a
9 9910 0050	Carrying case	2 2404 / 2 2408
5 1212 9000	Carrying case	2 2406 / 2 2426

DRILLS PRODUCT RANGE

PISTOL DRILLS



PNEUMATIC

PISTOL HAMMER DRILLS



PNEUMATIC

DRILLS WITH D-HANDLE



PNEUMATIC

CORNER DRILLS



PNEUMATIC
HYDRAULIC

HAMMER DRILLS



PNEUMATIC
HYDRAULIC

CORE DRILL UNITS



PNEUMATIC
HYDRAULIC

SPITZNAS

Maschinenfabrik GmbH, Fellerstraße 4, 42555 Velbert, Germany
 Tel: +49-(0)2052-605-0 Fax: +49-(0)2052-605-29
 E-Mail: sales@spitznas.com Internet: http://www.spitznas.com